

ELECTRONIC PROGRAMMER

Simple and user friendly : start/stop button, selection of 4 temperatures
Preset ironing speeds, not adjustable

EFFICIENCY

Acoustic comfort : <55 dB
Minimum space requirement: space saving, suitable for small spaces
Ideal for processing small quantity of flat linen in facilities like restaurants, guest rooms, hostels...

ROBUSTNESS

Nomex quality coating: resistant to high temperatures
Panels in grey skinplate and stainless steel
Chest in anodized aluminium

FEATURES



Large roll contact area with the linen
Roll lifting control by pedal
Two available models:
Standard: roll with cotton polyester coating
Nomex: roll with Nomex coating

MAINTENANCE

Easy installation : requires only an electrical connection
Easy access on both sides for maintenance


OTHERS

Front feeding and return
Roll ø 180 mm
Working widths: 1.000 and 1.200 mm
Electric heating
CE certification

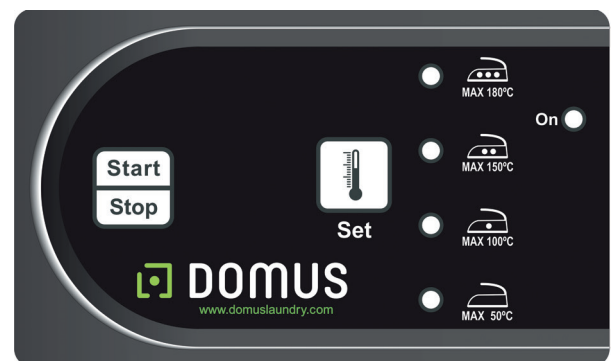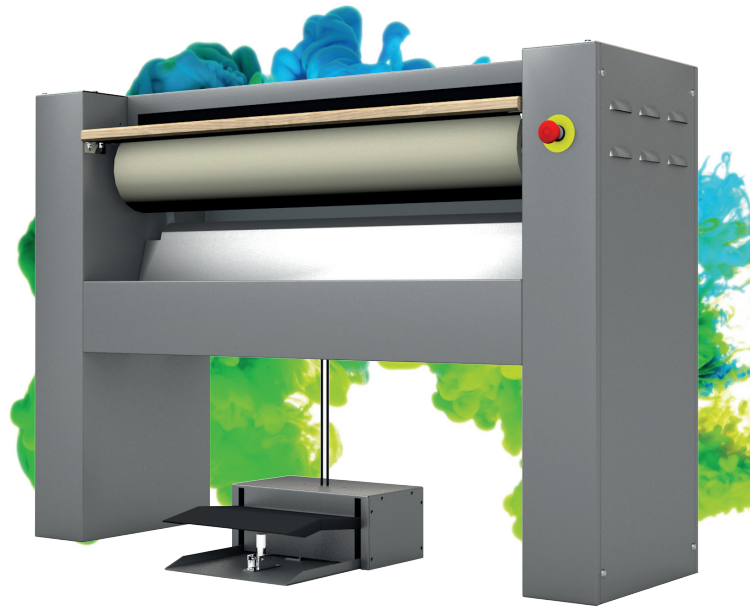

TECHNICAL DATA	UNIT.	PR-1018	PR-1218
GENERAL DATA			
Theoretical production*	Kg/h	15	20
Ø Roll	mm	180	180
Working width	mm	1.000	1.200
Ironing speed	mt/min	2,02	2,02
Electronic programmer	-	Yes	Yes
Bed lifting	-	By pedal	By pedal
POWER			
Heating power	Kw	3,3	4
Roll motor power	Kw	0,029	0,029
Total electric power	Kw	3,329	4,029
CONNECTIONS		ELECTRIC	ELECTRIC
Tension 230V - I + N + T	N° x mm ² /A	3 x 4 / 16A	3 x 4 / 20A
Tension 400V - III + N + T	N° x mm ² /A	-	-
OVERALL DIMENSIONS/ PACKING DIMENSIONS			
Net width / Gross width	mm	1.370 / 1.490	1.570 / 1.690
Net depth / Gross depth	mm	438 / 540	438 / 540
Net height / Gross height	mm	952 / 1.130	952 / 1.130
Net weight / Gross weight	Kg	80 / 100	90 / 110
Volume	m ³	0,57 / 0,91	0,65 / 1,03
OTHERS			
Noise Level	dB	55	55

*20-25% Theoretical production

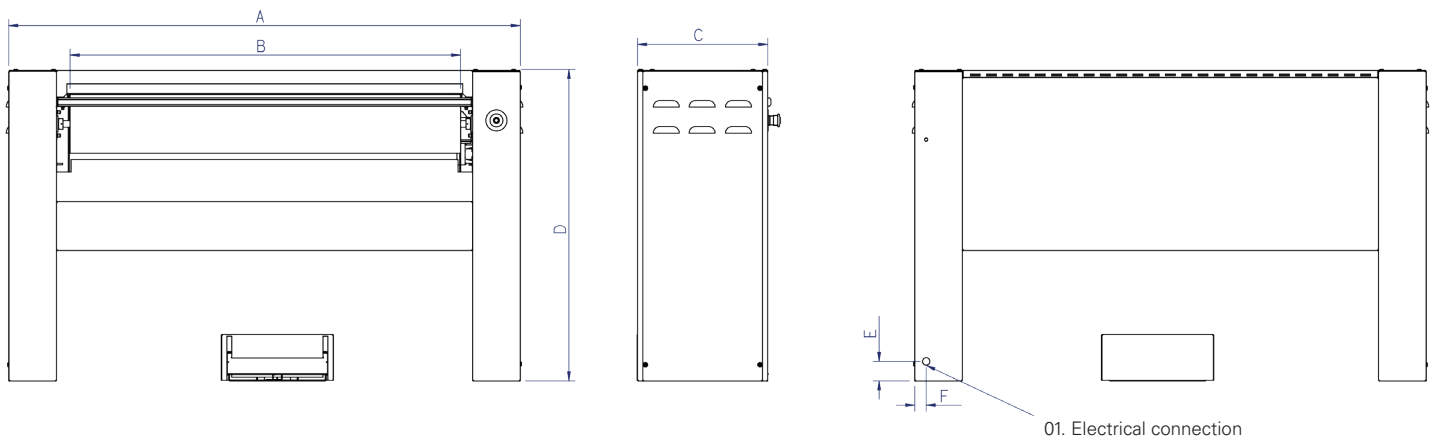

	A	B	C	D	E	F
PR-1018	1694	1447	689	1354	68	785
PR-1218	1694	1447	689	1354	68	785